



TUF-NM Series

NEMA-4X Certified Battery Unit

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

Features

Standard

- Fully gasketed cast aluminum back plate with clear polycarbonate cover – NEMA-4X Certified
- NSF Certified for food processing plants
- Comes standard with non-audible advanced diagnostic charger board, 10 minute time delay and lamp disconnect
- Non intrusive magnetic test switch
- Long-life, maintenance free sealed lead acid battery
- 1/2" rigid conduit entry on top and back
- Can be installed on 4-inch junction boxes
- Audible warning and time delay functions can be enabled or disabled during installation
- Micro-controller diagnostic system tests, detects and indicates battery, charger circuitry or MR16 lamp failures
- Comes standard with tamper-proof screws and bit
- Cold weather option (-40°C)
- NEXUS® compatible



Wire Guards

460.0031-RL Wall Mount

Replacement Lamps

Model	Specifications
580.0074-RL	M6W, MR16, 6V - 6W, flood
580.0079-RL	M10W, MR16, 6V - 10W, flood
580.0080-RL	M12W, MR16, 12V - 12W, flood
580.0068-RL	MH20W, MR16, 12V - 20W
580.0093-RL	L, MR16, 12V - 5W

Typical Specification

Supply and install the Ready-Lite NEMA-4X Certified **TUF-NM Series** battery unit.

Specifically designed for high abuse areas, wet locations, and cold weather (CW option -40°C), the housing shall be fully gasketed with a cast aluminum back plate and clear heavy-duty UV resistant polycarbonate cover. The heads shall be fully adjustable without tools and the lamps shall be high efficiency halogen MR16. The standard unit shall be equipped with tamper-proof screws and bits.


The Ready-Lite self-diagnostic Micro-controller charger board shall supply the rated load for a minimum of 30 minutes to 87.5% of the rated battery voltage. The charger incorporates lockout and brownout circuits, and low voltage disconnection. It protects the unit from over-current, short-circuit, and reverse polarity. The unit shall be rated 120/347V, 60Hz.

This unit shall self-test for 1 minute every 30 days, 10 minutes on the 6th month and 30 minutes every 12 months. The unit shall be furnished with a non-intrusive magnetic test switch. A "Service Required" lamp shall be located near the test switch and flash when a fault is detected. A four-LED diagnostic display shall be located inside the equipment and shall identify the source of failure (battery, charger, circuitry, or lamps).

The unit shall be CSA C22.2 No.141. certified. It shall also be NSF Certified for use in food processing plants.

The unit shall be Ready-Lite model: _____.

Dimensions

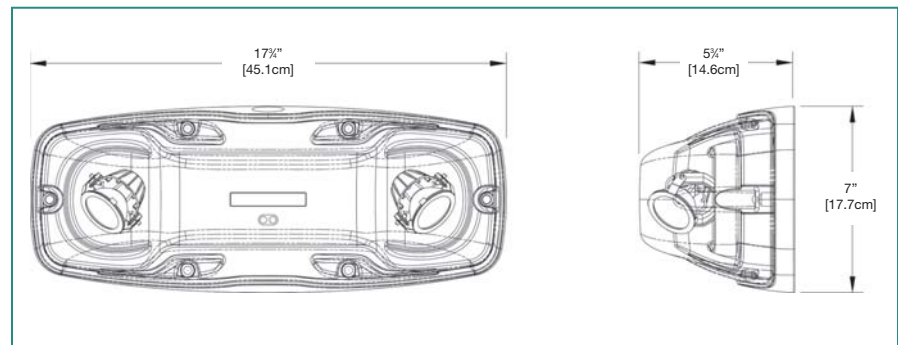

Power Consumption and Unit Rating

Model Number	AC Specs	Wattage Capacity					
		30min	1h00	1h30	2h00	4h00	
LDX6-36NM	120 / 347Vac	0.15 / 0.05 Amp	36W	21	15	12	6
LDX12-72NM		0.25 / 0.10 Amp	72	42	30	24	12
LDX12-108NM		0.25 / 0.10 Amp	108	63	45	36	18
Cold Temperature 36W		0.45 / 0.20 Amp	36	*	-	-	-
Cold Temperature 72 / 108W	20 Vac	0.85 Amp	72/108	*	-	-	-

*Note: capacity depends on the ambient temperature

Ordering Information

Series	Capacity	Cabinet	Number of Heads	Voltage/Wattage/Lamp Type	Colour	AC Voltage	Options
LDX6= 6 volts LDX12= 12 volts	-36= 6V-36W -72= 12V-72W -108= 12V-108W	NM= NEMA-4X	2= 2 heads	RM6= mini halogen, 6V-6 watts, MR16 RM10= mini halogen, 6V-10 watts, MR16 RM12= mini halogen, 12V-12 watts, MR16 RM20= mini halogen, 12V-20 watts, MR16 RMH20= mini halogen, 12V-20 watts, MR16 high-output LD7= 12V - 4 watts LED	Blank= factory white BK= black GY= grey	Blank= 120/347Vac 277= 277Vac	Blank= no options CW1= cold weather 120Vac CW3= cold weather 347Vac* NEX= NEXUS® system interface** NEXRF= wireless NEXUS® system interface** PMK= universal bracket (sold separately) *Available in 6V only. ** Not all options available with NEXUS® System. Please consult your sales representative.

EXAMPLE: LDX636NM2RM6

