



CXL3000B12 Series

Bilingual Edge-Lit Exit Sign

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

Features

- The LED Edge-Lit panels are fabricated of extruded acrylic, with precision etched lettering. They provide superior brightness and illumination compared to molded panels
- Normal AC operation and emergency DC operation – 120V to 347Vac and 6V to 48Vdc input
- Self-powered version also available
- Extruded acrylic panels with precision-etched lettering legend



Typical Specification


Supply and install the Ready-Lite **CSL3000B12 Series** LED bilingual Edge-Lit exit sign. The equipment shall operate with universal two-wire AC input voltage from 120V to 347Vac at less than 4 watts and universal two-wire DC input voltage from 6V to 48Vdc at less than 2 watts for single and double face signs. The housing assembly shall be fabricated of aluminum and consist of a universal aluminum back box. The back box shall be provided with conduit knockouts on top, back, and end. The trim plate shall be an angular shape (prismatic) and attach to the housing assembly with two (2) torsion spring retainers, thereby eliminating all visible hardware. The LED light strip shall be contained within the trim plate. The red LED technology shall be **AllnGaP**. The polished acrylic face panel shall have precision etched 6" high by 3/4" stroke red letters with a white, clear or mirror background with the words EXIT and SORTIE side by side. The exit sign specified for recessed applications will be supplied with a flat trim.

The exit sign in a self-powered configuration shall stay illuminated during emergency operation for at least 30 minutes upon AC failure.

The exit sign shall be CSA-C860 certified.

The exit sign shall be Ready-Lite model: _____.

Dimensions

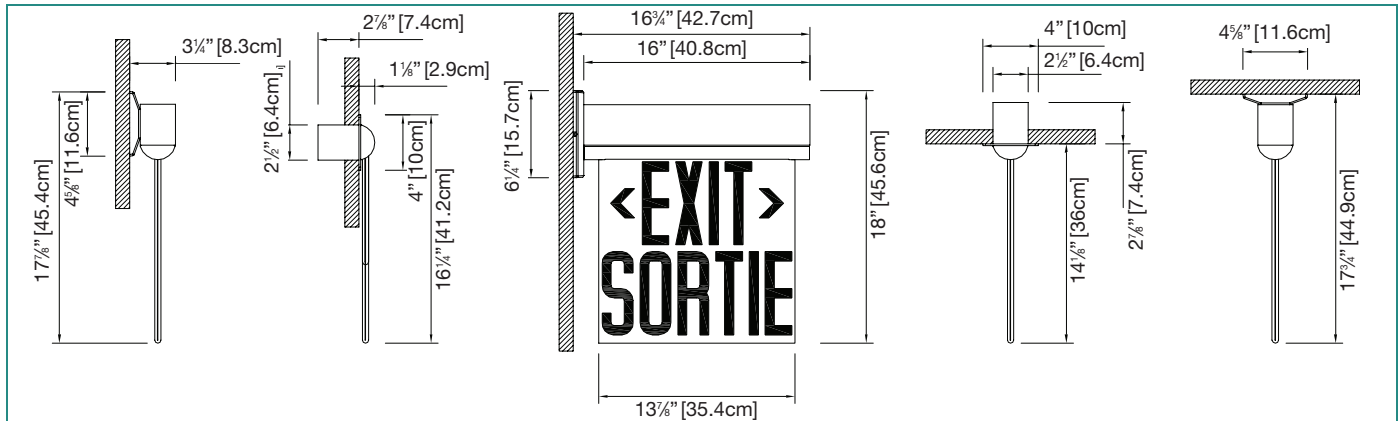

Power Consumption

Model	AC Specs		DC Specs	
AC/DC red legend	120 to 347Vac	Less than 4W	6 to 48Vdc	Less than 2W
Self-powered red legend	120 to 347Vac	Less than 4.5W	NiCad battery	Min. 30 minutes

Ordering Information

Series	Faceplates	Housing Colour	Power Source	Chevrons	Faceplate Colour	Approval
CXL = exit/sortie	3100 = single face 3200 = double face	W = factory white BA = brushed aluminum BK = black TA = textured aluminum	DC = 120Vac to 347Vac, 6Vdc to 48Vdc SP = 120Vac to 347Vac, self-powered	NA = no chevrons AL = chevron left AR = chevron right DA = double chevrons A = one chevron, double face	RC = red/clear* RW = red/white RM = red/mirror	B12
					*Single face only.	

EXAMPLE: CXL3100WDCNARCB12L