



RT/RQ/RM Series

Micro Tungsten Lamps

Micro Quartz Lamps, MR16 Lamps

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

Features

- Fire-retardant thermoplastic
- Variable light patterns using adjustable lens
- 300° rotation



Typical Specification

Lamp head and stem shall be injection molded, impact resistant, flame retardant thermoplastic. The lens shall be inverse concave design and fully adjustable for aisle or area distribution during installation without the need to energize the lamp. Visual identification of distribution shall be provided through position of adjustment pins.

The remote fixture shall be certified to CSA C22.2 No.250.

Fixture shall be supplied with a canopy for installation on any four inch octagon box. Housing shall be so designed to allow for lamp replacement if required. Lamp shall be _____ volts, _____ watts Model: RT-, RQ- or RM- by Ready-Lite.

The unit shall be Ready-Lite model: _____.

Wire Guards


| | |
|--------------|------------|
| 460.0029-RL: | Wall Mount |
|--------------|------------|

Replacement Lamps

| Model | Lamp Type | Voltage |
|-------------|------------------|-----------|
| 570.0016-RL | Tungsten | 6V - 9W |
| 570.0045-RL | Tungsten | 24V - 9W |
| 580.0015-RL | Halogen (quartz) | 12V - 12W |
| 580.0093-RL | LED | 12V - 4W |

See the complete list page 113

Dimensions

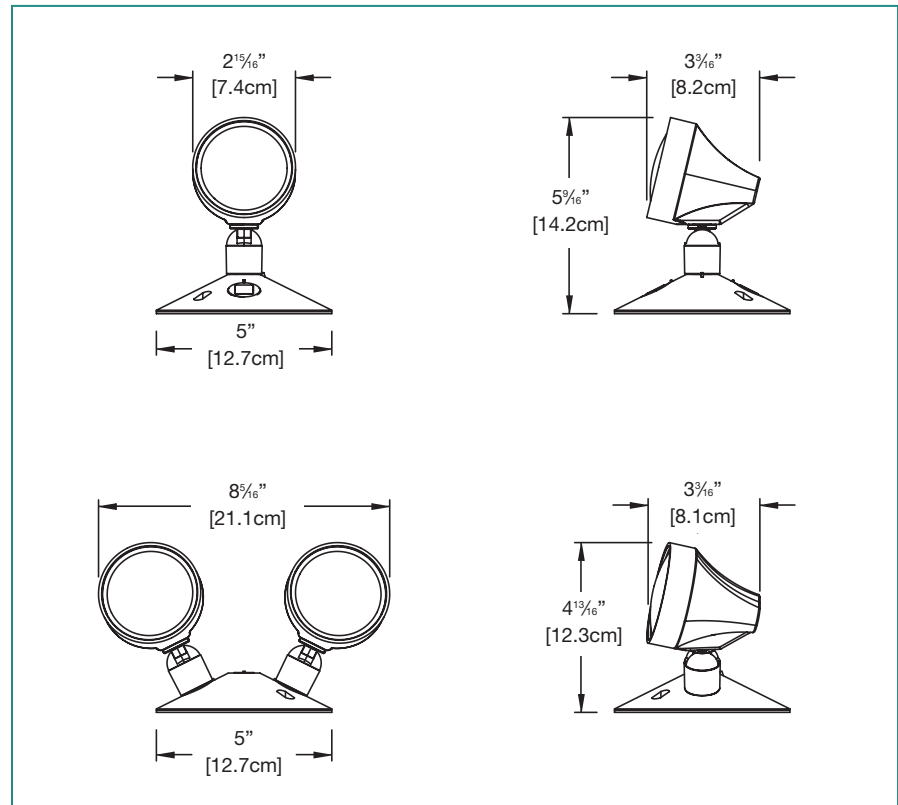

Ordering Information

| Series | Lamp Type | Number of Heads | Voltage/Wattage | Colour |
|-------------------------|--|--|--|---|
| R = mini, par 18 | T = tungsten, wedge base Q = halogen, quartz bi-pin M = halogen, MR16 | 1 = single head 2 = double head 3 = triple head | -6/9 = 6V - 9 watts, wedge base -12/9 = 12V - 9 watts, wedge base -12/18 = 12V - 18 watts, wedge base -24/9 = 24V - 9 watts, wedge base -24/18 = 24V - 18 watts, wedge base -6/8 = 6V - 8 watts, quartz bi-pin -6/12 = 6V - 12 watts, quartz bi-pin -12/8 = 12V - 8 watts, quartz bi-pin -12/10 = 12V - 10 watts, MR16 -6/6 = 6V - 6 watts, MR16 -6/10 = 6V - 10 watts, MR16 -12/12 = 12V - 12 watts, MR16 -12/20 = 12V - 20 watts, MR16 -LD7 = 12V-4 watts LED | Blank = factory white BK = black |

EXAMPLE: RT2-6/9