

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

RFX Series

Hazardous Location Remote Lighting Fixtures



Typical Specification

Supply and install the Ready-lite **RFX Series** of hazardous location remote heads. The head housing will be die cast aluminum with gray epoxy powder coat finish. The lens shall be a clear, impact and heat resistant prismatic glass globe. The head shall be factory sealed. External seals shall not be required.

The remote head shall come complete with a _____ mounting connection and include _____ lamp(s) rated _____ volts _____ watts.

The remote head shall be suitable for Class _____, Division _____, Group _____.


The unit shall be Ready-Lite model: _____.

Features

- CSA Certified for use in hazardous locations: Class I, Divisions 1 and 2, Groups B, C, D Class II, Divisions 1 and 2, Groups E, F, G Class III, Divisions 1 and 2
- Available in 6, 12, 24 and 120V
- Die-cast aluminum body with grey epoxy powder coat finish
- Clear, impact and heat resistant prismatic glass globe
- Available with single-lamp or twin-lamp combination



Dimensions

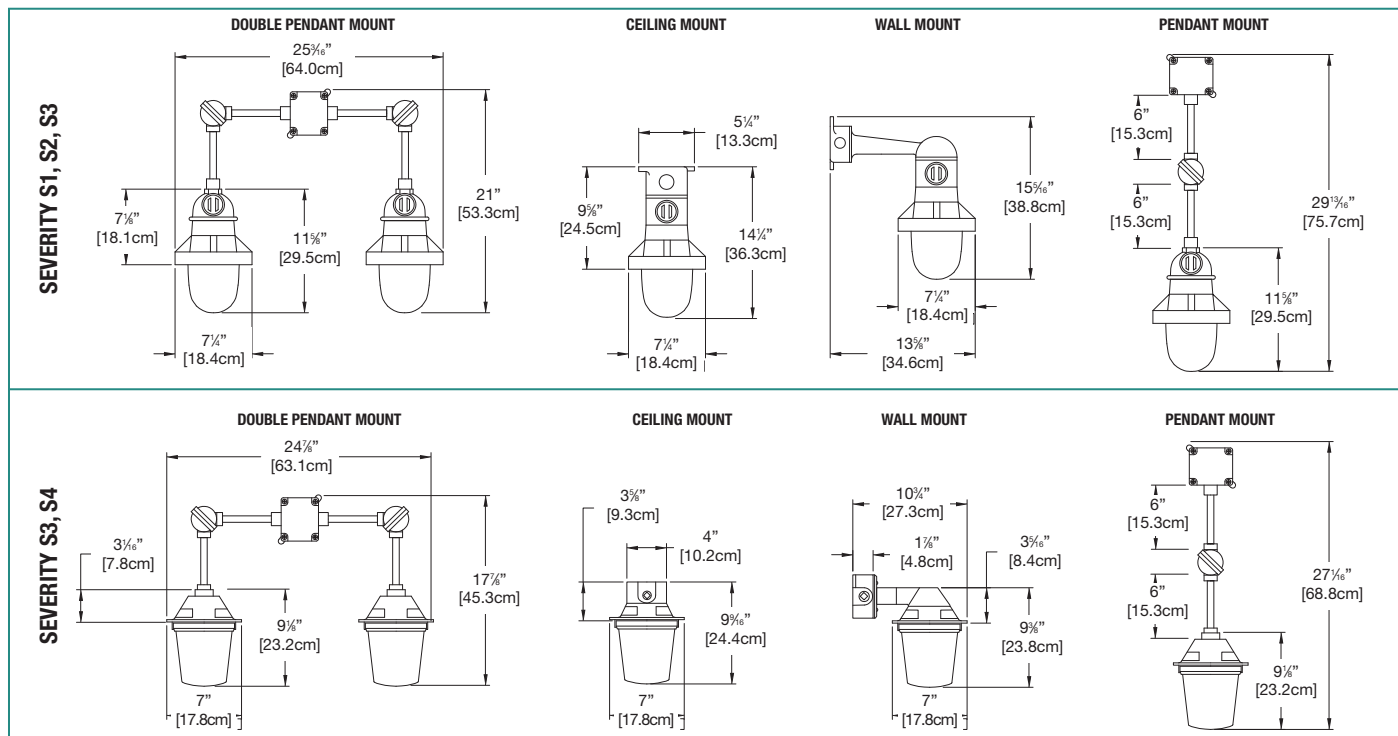

Replacement Lamps

Model	Type	Voltage-Wattage
580.0011-RL	Halogen	6V - 12W
580.0015-RL		12V - 12W
580.0027-RL		12V - 20W
580.0023-RL		24V - 20W

See the complete list page 113

Environment	Severity Code
Cl. I, Div. 1, Gr. B	S1
Cl. I, Div. 1, Gr. C, D	S2
Cl. I, Div. 2, Gr. B, C, D	S3
Cl. II, Div. 1 & 2, Gr. E, F, G	S4
Cl. III, Div. 1 & 2	

Certification Guide for Remote Lighting Fixtures (40°C ambient)

Severity Code	S1	S2	S3	S4
Temperature Code	T4A	T5	T1	T3C (E.G.F.)
CSA/UL rating	Max. 120°C	Max. 100°C	Max. 450°C	Max. 165°C

Ordering Information

Series	Severity Code	Voltage	Lamp Wattage/Type	Mounting
RFXQ = single remote, 1 lamp RFXQ2 = single remote, 2 lamps RFXQ2-P2 = double remote, 1 lamp*	S1 = CL.1, Div.1, Gr. B S2 = CL.1, Div.1, Gr.C D S3 = CL.1, Div.2, Gr. B,C,D S4 = CL.2, Div.1,&2, Gr.E, F, G CL3, Div. 1&2	-6/ = 6 volts -12/ = 12 volts -24/ = 24 volts -120/ = 120 volts	12 = halogen, 6V,12V-12 watt, quartz bi-pin 20 = halogen, 12V, 24V - 20 watt, quartz bi-pin Note: For other lamp options, please consult your sales representative.	C = ceiling mount P = pendant mount W = wall mount

EXAMPLE: RFXQ16/12C