

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

Surface Mounted Series

Remote Emergency Lighting Fixtures



Wire Guards

| | |
|-------------|-----------------|
| 460.0035-RL | Wall Mount (LT) |
| 460.0082-RL | Wall Mount (LQ) |
| 460.0078-RL | Wall Mount (LS) |



Dimensions

LT/LQ/LS Features

- Positive aim swivel
- Single, double or triple head
- Certified CSA C22.2 No.250



Replacement Lamps

| Model | Lamp Type | Voltage-Wattage |
|-------------|---------------------------|-----------------|
| 570.0016-RL | Mini Tungsten, Wedge base | 6V - 9W |
| 570.0025-RL | Tungsten, Wedge base | 12V - 9W |
| 580.0023-RL | Halogen (quartz), Bi-pin | 24V - 20W |

See the complete list page 113

| Fixture | Length | Height | Depth | Canopy |
|---------|-------------------|------------------|-------------------|---------------------------------|
| LT: 1 | 4 3/4" (12.7 cm) | 7 7/8" (18.7 cm) | 4 3/8" (10.5 cm) | 5.0" (12.7 cm) Diameter |
| LQ: 2 | 11 1/2" (28.2 cm) | 6 7/8" (16.8 cm) | 4 3/8" (10.5 cm) | Canopy: 5" (12.7 cm) Diameter |
| LS: 3 | 14 7/8" (37.8 cm) | 6 7/8" (16.2 cm) | 14 7/8" (37.8 cm) | Canopy: 9.5" (24.1 cm) Diameter |
| LH: 4 | 4 3/4" (12.7 cm) | 7 7/8" (18.7 cm) | 4 3/8" (10.5 cm) | 5.0" (12.7 cm) Diameter |


Ordering Information

| Series | Number of Heads | Voltage/Wattage/Lamp Type | Colour | Options | |
|---|---|--|---|---|--------------------------------|
| LT = tungsten, par 36 LQ = halogen, par 36 LS = tungsten sealed beam LH = halogen quartz sealed beam | 1 = single 2 = double 3 = triple | -6/9 = 6V - 9 watts, tungsten, wedge base -6/18 = 6V - 18 or 25 watts, tungsten, D.C.B. -12/9 = 12V - 9 or 18 watts, tungsten, wedge base -12/25 = 12V - 25 watts, tungsten, D.C.B. -24/9 = 24V - 9 or 18 watts, tungsten, wedge base -24/25 = 24V - 25 watts, tungsten, D.C.B. -6/12 = 6V - 8, 12, or 20 watts, halogen, quartz bi-pin -12/12 = 12V - 8, 12, 20 or 55 watts, halogen, quartz bi-pin NOTE: " _ " = insert wattage required *Available with metal heads only. | -24/20 = 24V - 20 or 70 watts, halogen, quartz bi-pin -6/9 = 6V - 9, 12, 18 or 25 watts, tungsten, sealed beam -12/12 = 12V - 12, 18 or 25 watts, tungsten, sealed beam -6/12 = 6V - 8, 12 or 20 watts, halogen, quartz sealed beam -12/12 = 12V - 8, 12 or 37 watts halogen, quartz sealed beam -32/18 = 32V - 18 or 25 watts, tungsten, D.C.B. -120/10 = 120V, 10, 15, 30 or 50 watts, tungsten, D.C.B. -120/35 = 120V 35watts, halogen, D.C.B. -120/50W = 120V - 50 watts, halogen, D.C.B.* | Blank = factory white BK = black | TC = teflon coated lens |

EXAMPLE: LTI-6/9

Wire Guards

| | |
|-------------|--------------------------|
| 460.0035-RL | Wall Mount (Single cube) |
| 460.0031-RL | Wall Mount (Twin cube) |
| 460.0032-RL | Wall Mount (Double cube) |

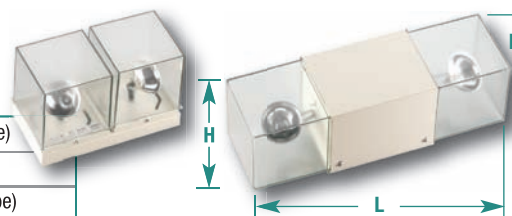

Dimensions

VQ/VQDS/VQD Features

- Cubic, vandal-resistant surface-mounted fixture
- Single, double or twin cube with center body
- Frosted polycarbonate cube
- Certified CSA C22.2 No.250



Replacement Lamps

| Model | Lamp Type | Voltage-Wattage |
|-------------|-------------------------------|-----------------|
| 570.0016-RL | Mini Tungsten, Wedge base | 6V - 9W |
| 580.0011-RL | Mini Halogen (quartz), Bi-Pin | 6V - 12W |
| 580.0079-RL | MR16, Flood | 6V - 10W |

See the complete list page 113

| Fixture | Length | Height | Depth |
|-------------|-------------------|------------------|------------------|
| Single cube | 4 3/4" (12.1 cm) | 4 7/8" (12.4 cm) | 4 3/4" (12.1 cm) |
| Twin cube | 9 1/2" (24.1 cm) | 5 7/8" (14.9 cm) | 4 3/4" (12.1 cm) |
| Double cube | 14 3/4" (37.4 cm) | 4 3/4" (12.1 cm) | 4 3/4" (12.1 cm) |

Ordering Information

| Series | Lamp Type | Number of Heads | Lamp Style and Wattage | Options | Colour |
|-------------------|---|---|--|--|---|
| V = Series | T = tungsten Q = halogen M = halogen, MR16 | 1 = single cube 2 = twin cubes W = double cube | -6/9 = 6V - 9 watts, tungsten, wedge base -12/9 = 12V - 9 watts, tungsten, wedge base -12/18 = 12V - 18 watts, tungsten, wedge base -24/9 = 24V - 9 watts, tungsten, wedge base -6/8 = 6V - 8 watts, quartz bi-pin -6/12 = 6V - 12 watts, quartz bi-pin -12/8 = 12V - 8 watts, quartz bi-pin -12/12 = 12V - 12 watts, quartz bi-pin -24/20 = 24V, 12V - 20 watts, quartz bi-pin -6/6 = 6V - 6 watts, MR16 -6/10 = 6V - 10 watts, MR16 -12/12 = 12V - 12 watts, MR16 -12/20 = 12V - 20 watts, MR16 -12/20 = 12V - 20 watts, quartz bi-pin -12/35 = 12V - 35 watts, MR16 -12/50 = 12V - 50 watts, MR16 -12/55 = 12V - 55 watts, quartz bi-pin -24/12 = 24V - 12 watts, MR16 -24/20 = 24V - 20 watts, MR16 -24/35 = 24V - 35 watts, MR16 -24/50 = 24V - 50 watts, MR16 -120/35 = 120V - 35 watts, halogen, D.C.B. -LD7 = 12V - 4 watts, MR16 LED | Blank = no options TP = tamper proof screws | Blank = factory white BK = black |

EXAMPLE: VQ2-6/8