

Project/Location:

Contractor:

Date:

Prepared by:

# RXL3000-FTP Series

## Full Recessed Edge-Lit Exit Sign



### Typical Specification

Supply and install the Ready-Lite **RXL3000-FTP Series** LED edge-lit exit sign. The equipment shall operate with universal two-wire AC input voltage from 120Vac to 347Vac at less than 4.5 watts and universal two-wires DC input voltage from 6Vdc to 48Vdc at less than 2.5 watts for single and double face signs. The trim assembly shall be fabricated of die cast aluminum and have a flat shape. The back box shall be made of satin-coated steel and be provided with conduit knockouts on top, back and end. The trim plate shall attach to the housing assembly with two (2) torsion spring retainers thereby eliminating all visible screws or hardware. The LED light strip shall be contained within the trim plate. Red LED technology shall be **ALINGAP**. The polished acrylic face panel shall have precision etched 6" high and 3/4" inch stroke red letters with a white, clear or mirror background. The equipment shall be provided with bar hangers to facilitate installation.

The exit sign in a self-powered configuration shall stay illuminated during emergency operation for at least 90 minutes upon AC failure.

The equipment shall be certified CSA-C860.

The equipment shall be Ready-Lite model: \_\_\_\_\_.

### Features


- Low-profile trim enables exit signs to be mounted in areas where space is restricted
- Modular retainer clips allow "snap-in" installation of face panel after installation of back box
- Extruded acrylic face panels with precision-etched lettering legend
- Energy efficient – consumes less than 4.5 watts in AC or DC mode



Made in Canada



### Dimensions

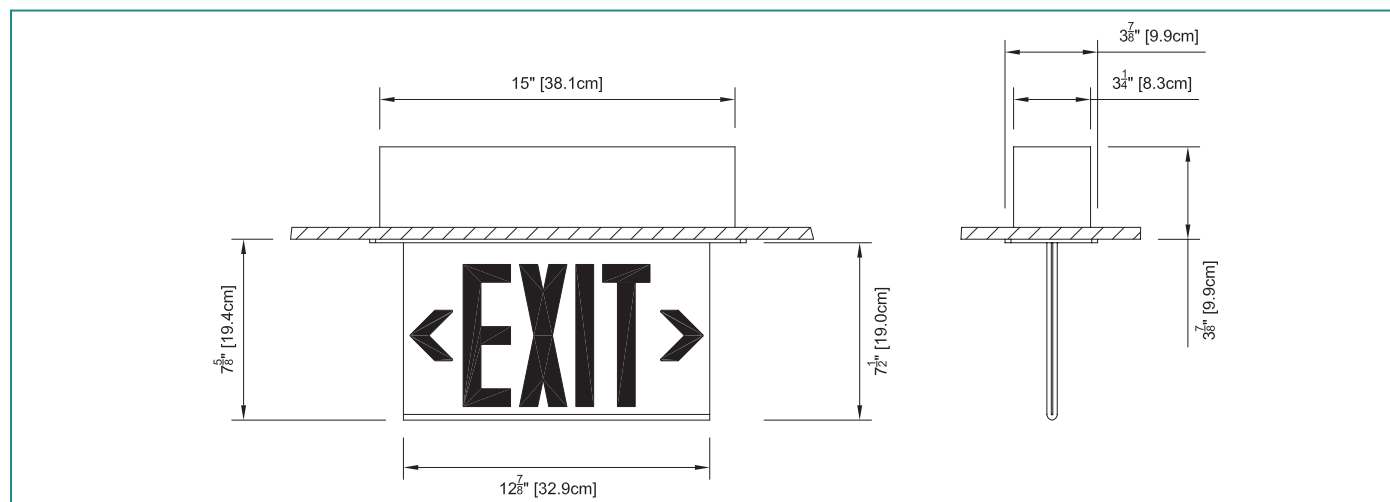

### Power Consumption

| Model              | AC Specs      |                | DC Specs       |                 |
|--------------------|---------------|----------------|----------------|-----------------|
|                    | AC/DC red     | 120 to 347Vac  | Less than 4.5W | 6 to 48Vdc      |
| AC/DC green        | 120 to 347Vac | Less than 2.5W | 6 to 48Vdc     | Less than 1.5W  |
| Self-powered red   | 120 to 347Vac | Less than 5W   | NiCad battery  | Min. 90 minutes |
| Self-powered green | 120 to 347Vac | Less than 4W   | NiCad battery  | Min. 90 minutes |

### Ordering Information

| Series    | Faces  | Housing Colour  | Trim                   | Faceplate Colour   | Chevrons  | Voltage   |
|-----------|--|---|------------------------|--|---|---|
| RXL= exit | <b>3100</b> = single Face<br><b>3200</b> = double Face | <b>Blank</b> = factory white<br><b>BA</b> = brushed aluminum<br><b>BK</b> = black<br><b>PB</b> = polished brass<br><b>CH</b> = chrome<br><b>BR</b> = bronze | <b>FTP</b> = flat trim | <b>RC</b> = red/clear*<br><b>RW</b> = red/white<br><b>RM</b> = red/mirror<br><b>GG</b> = green/clear*<br><b>GW</b> = green/white<br><b>GM</b> = green/mirror | <b>-NA</b> = no chevrons<br><b>-AL</b> = chevron left<br><b>-AR</b> = chevron right<br><b>-DA</b> = double chevrons<br><b>-ALR</b> = one chevron each side, double face | <b>-DC</b> = 120 to 347Vac, 6 to 48Vdc<br><b>-SP</b> = self-powered, 120 to 347Vac<br><b>-SPD</b> = self-powered, 120 to 347Vac c/w self-diagnostic |
|           |  |   |                        | *Single face only.   |   |   |

EXAMPLE: RXL3100FTPRC-NA-DC