

Project/Location: \_\_\_\_\_

Contractor: \_\_\_\_\_

Date: \_\_\_\_\_

Prepared by: \_\_\_\_\_

# Surface Mounted Series

## Remote Emergency Lighting Fixtures



### Wire Guards

460.0035-RL	Wall Mount (LT)
460.0082-RL	Wall Mount (LQ)
460.0078-RL	Wall Mount (LS)



### LT/LQ/LS Features

- Positive aim swivel
- Single, double or triple head
- Certified CSA C22.2 No.250



### Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-RL	Mini Tungsten, Wedge base	6V - 9W
570.0025-RL	Tungsten, Wedge base	12V - 9W
580.0023-RL	Halogen (quartz), Bi-pin	24V - 20W

See the complete list page 113

### Dimensions

Fixture	Length	Height	Depth	Canopy
LT: 1	4 3/4" (12.7 cm)	7 7/8" (18.7 cm)	4 3/8" (10.5 cm)	5.0" (12.7 cm) Diameter
LQ: 2	11 1/2" (28.2 cm)	6 7/8" (16.8 cm)	4 3/8" (10.5 cm)	Canopy: 5" (12.7 cm) Diameter
LS: 3	14 7/8" (37.8 cm)	6 7/8" (16.2 cm)	14 7/8" (37.8 cm)	Canopy: 9.5" (24.1 cm) Diameter
LH: 4	4 3/4" (12.7 cm)	7 7/8" (18.7 cm)	4 3/8" (10.5 cm)	5.0" (12.7 cm) Diameter


### Ordering Information

Series	Number of Heads	Voltage/Wattage/Lamp Type	Colour	Options	
<b>LT</b> = tungsten, par 36 <b>LQ</b> = halogen, par 36 <b>LS</b> = tungsten sealed beam <b>LH</b> = halogen quartz sealed beam	<b>1</b> = single <b>2</b> = double <b>3</b> = triple	<b>-6/9</b> = 6V - 9 watts, tungsten, wedge base <b>-6/</b> __ = 6V - 18 or 25 watts, tungsten, D.C.B <b>-12/</b> __ = 12V - 9 or 18 watts, tungsten, wedge base <b>-12/25</b> = 12V - 25 watts, tungsten, D.C.B. <b>-24/</b> __ = 24V - 9 or 18 watts, tungsten, wedge base <b>-24/25</b> = 24V - 25 watts, tungsten, D.C.B. <b>-6/</b> __ = 6V - 8, 12, or 20 watts, halogen, quartz bi-pin <b>-12/</b> __ = 12V - 8, 12, 20 or 55 watts, halogen, quartz bi-pin  <b>NOTE: " __"= insert wattage required</b> *Available with metal heads only.	<b>-24/</b> __ = 24V - 20 or 70 watts, halogen, quartz bi-pin <b>-6/</b> __ = 6V - 9, 12, 18 or 25 watts, tungsten, sealed beam <b>-12/</b> __ = 12V - 12, 18 or 25 watts, tungsten, sealed beam <b>-6/</b> __ = 6V - 8, 12 or 20 watts, halogen, quartz sealed beam <b>-12/</b> __ = 12V - 8, 12 or 37 watts halogen, quartz sealed beam <b>-32/</b> __ = 32V - 18 or 25 watts, tungsten, D.C.B. <b>-120/</b> __ = 120V, 10, 15, 30 or 50 watts, tungsten, D.C.B. <b>-120/35</b> = 120V 35watts, halogen, D.C.B. <b>-120/50W</b> = 120V - 50 watts, halogen, D.C.B.*	<b>Blank</b> = factory white <b>BK</b> = black	<b>TC</b> = teflon coated lens

EXAMPLE: LTI-6/9

### Wire Guards

460.0035-RL	Wall Mount (Single cube)
460.0032-RL	Wall Mount (Twin cube)
460.0031-RL	Wall Mount (Double cube)

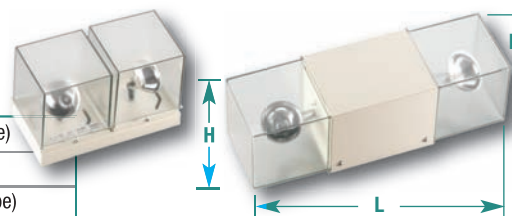

### VQ/VQDS/VQD Features

- Cubic, vandal-resistant surface-mounted fixture
- Single, double or twin cube with center body
- Frosted polycarbonate cube
- Certified CSA C22.2 No.250



### Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-RL	Mini Tungsten, Wedge base	6V - 9W
580.0011-RL	Mini Halogen (quartz), Bi-Pin	6V - 12W
580.0079-RL	MR16, Flood	6V - 10W

See the complete list page 113

### Dimensions

Fixture	Length	Height	Depth
Single cube	4 3/4" (12.1 cm)	4 7/8" (12.4 cm)	4 3/4" (12.1 cm)
Twin cube	9 1/2" (24.1 cm)	5 7/8" (14.9 cm)	4 3/4" (12.1 cm)
Double cube	14 3/4" (37.4 cm)	4 3/4" (12.1 cm)	4 3/4" (12.1 cm)

### Ordering Information

Series	Lamp Type	Number of Heads	Lamp Style and Wattage	Options	Colour
<b>V</b> = Series	<b>T</b> = tungsten <b>Q</b> = halogen <b>M</b> = halogen, MR16	<b>1</b> = single cube <b>2</b> = twin cubes <b>W</b> = double cube	<b>-6/9</b> = 6V - 9 watts, tungsten, wedge base <b>-12/9</b> = 12V - 9 watts, tungsten, wedge base <b>-12/18</b> = 12V - 18 watts, tungsten, wedge base <b>-24/9</b> = 24V - 9 watts, tungsten, wedge base <b>-6/8</b> = 6V - 8 watts, quartz bi-pin <b>-6/12</b> = 6V - 12 watts, quartz bi-pin <b>-12/8</b> = 12V - 8 watts, quartz bi-pin <b>-12/12</b> = 12V - 12 watts, quartz bi-pin <b>-24/20</b> = 24V, 12V - 20 watts, quartz bi-pin <b>-6/6</b> = 6V - 6 watts, MR16 <b>-6/10</b> = 6V - 10 watts, MR16 <b>-12/12</b> = 12V - 12 watts, MR16  <b>-12/20</b> = 12V - 20 watts, MR16 <b>-12/20</b> = 12V - 20 watts, quartz bi-pin <b>-12/35</b> = 12V - 35 watts, MR16 <b>-12/50</b> = 12V - 50 watts, MR16 <b>-12/55</b> = 12V - 55 watts, quartz bi-pin <b>-24/12</b> = 24V - 12 watts, MR16 <b>-24/20</b> = 24V - 20 watts, MR16 <b>-24/35</b> = 24V - 35 watts, MR16 <b>-24/50</b> = 24V - 50 watts, MR16 <b>-120/35</b> = 120V - 35 watts, halogen, D.C.B. <b>-LD7</b> = 12V - 4 watts, MR16 LED	<b>Blank</b> = no options <b>TP</b> = tamper proof screws	<b>Blank</b> = factory white <b>BK</b> = black

EXAMPLE: VQ2-6/8